




## Featuring full electronics and more precise operation

Canature 565 valves use the latest piston, seal and spacer design for more precise operation and performance. This allows 565 valves to operate efficiently at lower salt settings to conserve salt and water.

## 565 valves come with full diagnostics to reveal important operational information in real time!

With Canature 565 valves you and your customers see important operational data, which scrolls across the large LED display, continuously. (See list of data, at right). With 565 valves every function is adjustable, and valves can be programmed to show this key data in English or Spanish, without the need of an operational manual or use of confusing codes.

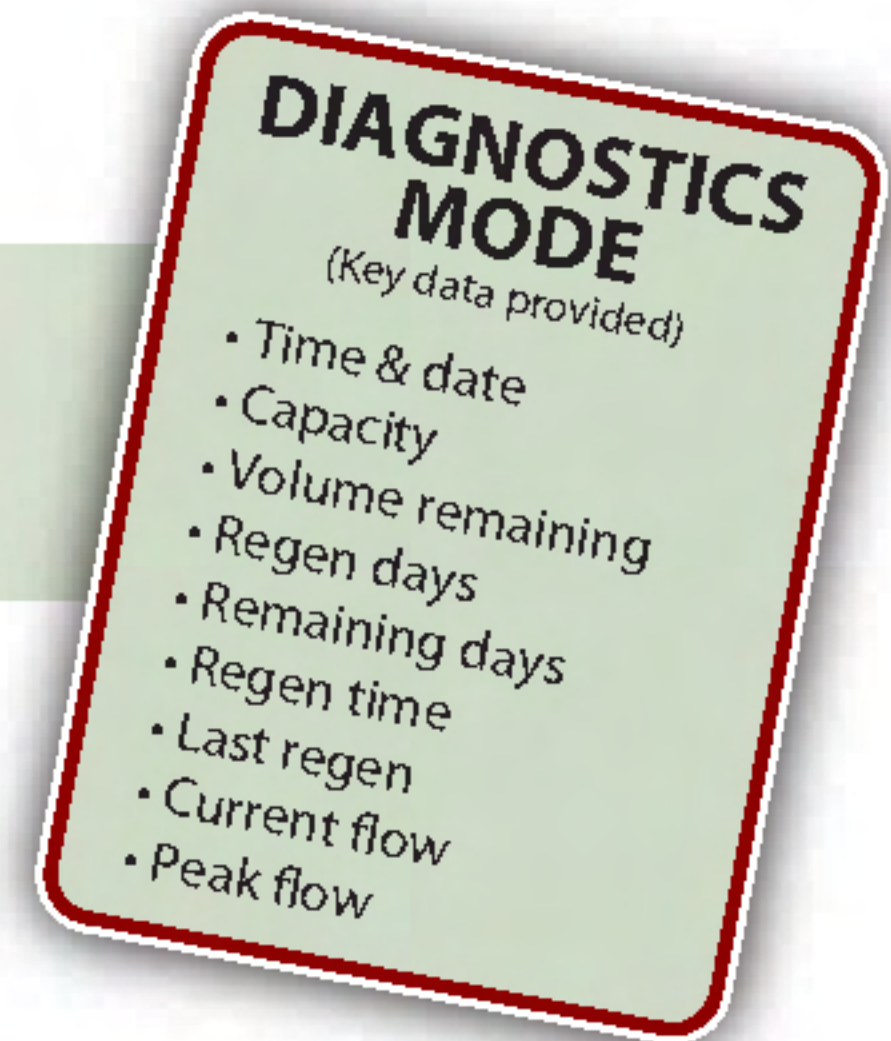

## SPECIAL FEATURES



By-Pass is included using quick connect fittings.



Drain line connection uses quick connect fittings.



Quick connect power cord.



Meter is installed in the by-pass valve.

## Additional features & benefits

- Easy programming.
- Self-charging capacitor to maintain time of day during a power outage, while program settings are maintained in permanent memory.
- All cycles are fully adjustable.
- Seven year limited warranty.

### SPECIFICATIONS

Pipe sizes	¾" and 1" fittings available
Tank thread	2-1/2" NPSM
Regeneration	Down flow
Riser tube size	1.05"
Drain line	½" quick connect
Brine line	3/8" quick connect
Shipping weight	7 lbs.

Continuous flow	20 GPM
Peak flow (at 15 psi)	26 GPM
Max. Backwash (25 psi)	7 GPM
Tank sizes (for softeners)	Up to 16" diameter
Tank sizes (for filters)	Up to 10" diameter
Operating pressure	20 psi min. to 125 psi max.
Temperature range	34°F to 110°F